






A

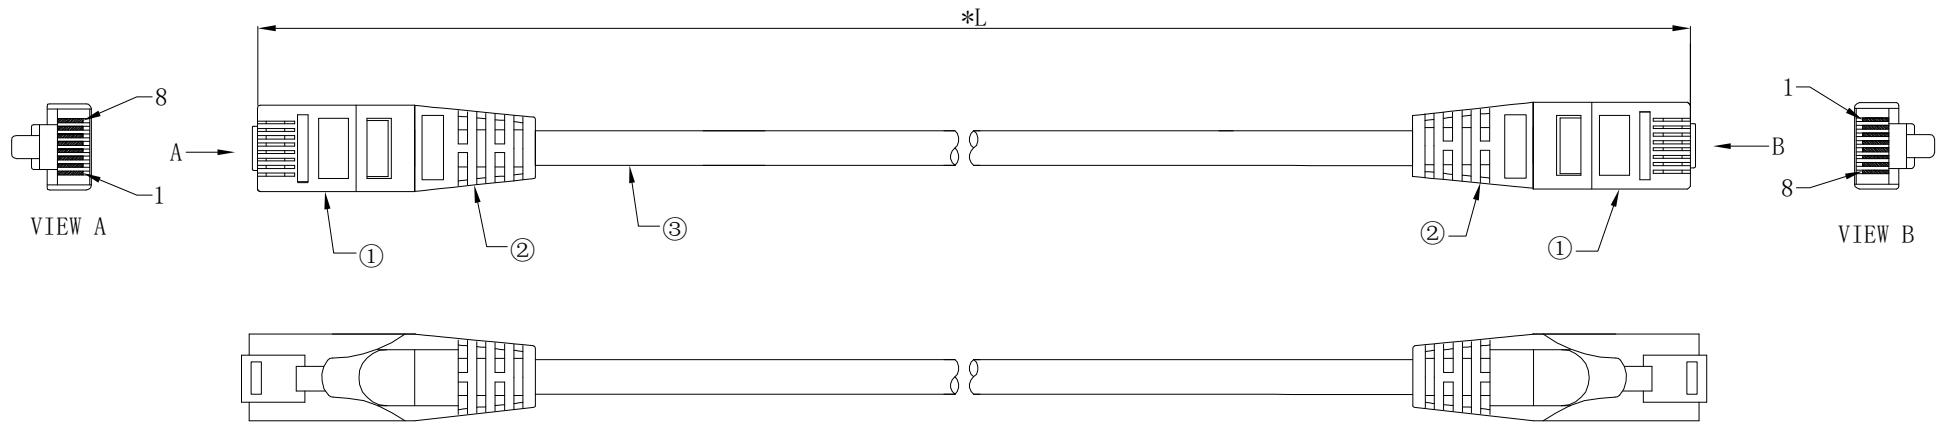

B

C

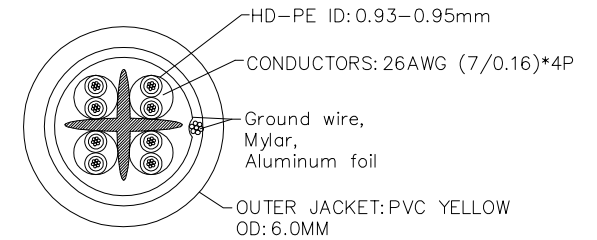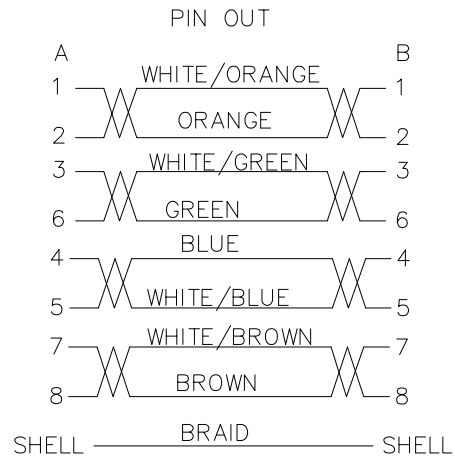

No	L	CABLE
DW-F6A-0025-YL	250±40mm	CAT. 6A/FTP 26AWG, YELLOW
DW-F6A-005-YL	500±40mm	CAT. 6A/FTP 26AWG, YELLOW
DW-F6A-010-YL	1000±40mm	CAT. 6A/FTP 26AWG, YELLOW
DW-F6A-020-YL	2000±40mm	CAT. 6A/FTP 26AWG, YELLOW

NOTES:

1. ELECTRICAL TEST:100%OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE:5 OHM MAX
3. INSULATOR RESISTANCE: DC300V/0.01S 500K OHM MIN.
4. PRINTING WORD OF CABLE

E

3	Cable	CAT. 6A/FTP CABLE 26AWG(7/0.16)*4P+AL+D(7/0.12BS) JACKET: PVC, YELLOW; OD:6.0±0.2mm	1
2	Molding	45P PVC OUTER MOLDING HOUSING, COLOR:YELLOW	2
1	Connector	RJ45 MALE CONNECTOR(SHIELD), PIN GOLD PLATED 3U".	2
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED						
			PART DESCRIPTION: Patch Cable CAT6A FTP PVC 1m Yellow Non-Snag-			
	Appd: JIM. KING		Part No: DW-F6A-010-YL			
	Check:		Date	Scale	Unit	Type
Draw: Gavin		2022.11.22		Free	MM	Z
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm				Page 1/1		

1

2

3

4

5

6