






A

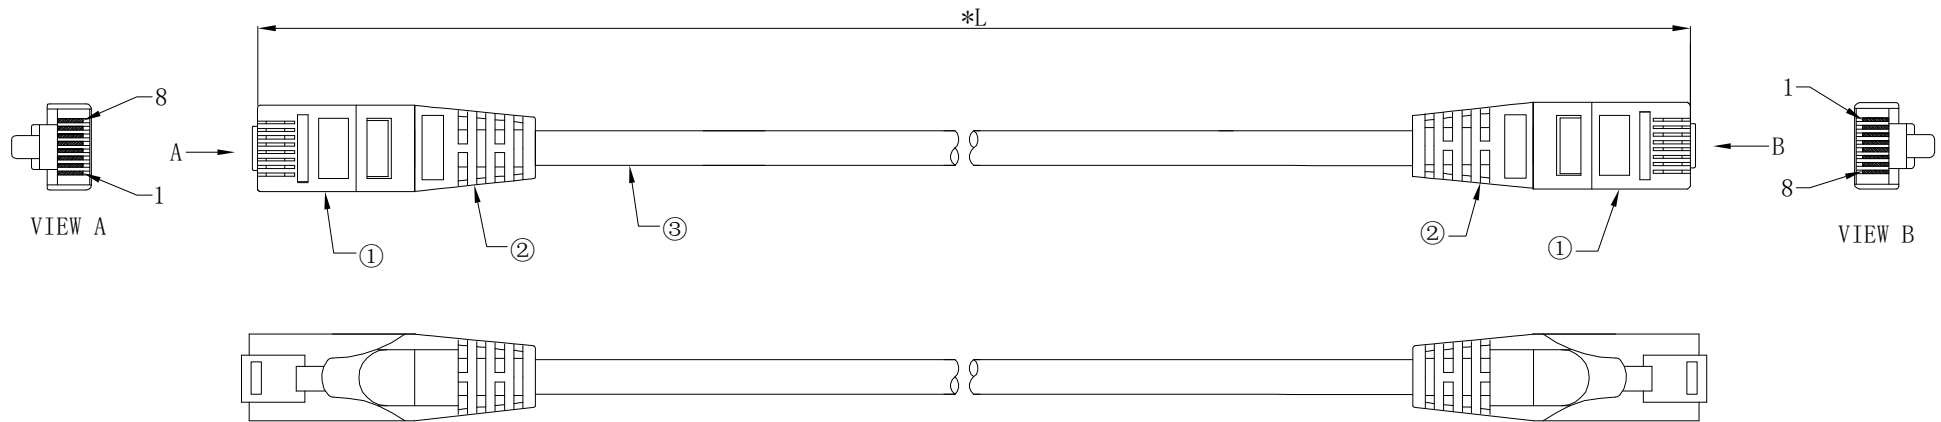

B

C

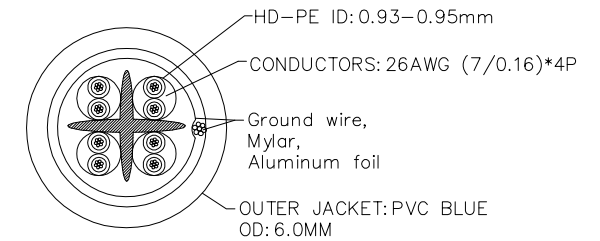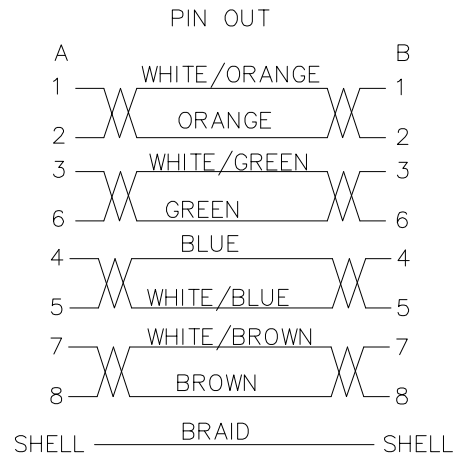

No	L	CABLE
DW-F6A-0025-BL	250±40mm	CAT. 6A/FTP 26AWG, BLUE
DW-F6A-005-BL	500±40mm	CAT. 6A/FTP 26AWG, BLUE
DW-F6A-010-BL	1000±40mm	CAT. 6A/FTP 26AWG, BLUE
DW-F6A-020-BL	2000±40mm	CAT. 6A/FTP 26AWG, BLUE

NOTES:

1. ELECTRICAL TEST:100%OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE:5 OHM MAX
3. INSULATOR RESISTANCE: DC300V/0.01S 500K OHM MIN.
4. PRINTING WORD OF CABLE

E

3	Cable	CAT. 6A/FTP CABLE 26AWG(7/0.16)*4P+AL+D(7/0.12BS) JACKET: PVC, BLUE; OD:6.0±0.2mm	1
2	Molding	45P PVC OUTER MOLDING HOUSING, COLOR:BLUE	2
1	Connector	RJ45 MALE CONNECTOR(SHIELD), PIN GOLD PLATED 1U".	2
NO	PART NAME	DESCRIPTION	QTY

-TOLERANCES- UNLESS OTHERWISE SPECIFIED						
	PART DESCRIPTION: Patch Cable CAT6A FTP PVC 1m Blue Non-Snag-Proof					
	P/N: DW-F6A-010-BL					
	Appd: JIM. KING	Date	Scale	Unit	Type	Page
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.25mm 30 - 120mm ± 0.30mm		Check:	2022.11.30	Free	MM	Z
		Draw: Gavin				1/1

1

2

3

4

5

6