


A/I-DQ(ZN)BH

This cable is suitable for indoor or outdoor use. The cable has higher level of rodent protection.

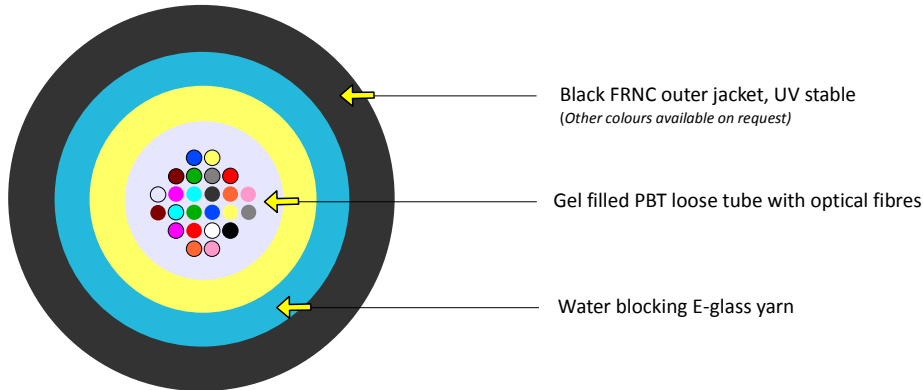

Fibre colour coding

According to IEC 60304

1 Red	7 Brown	13 Red*	19 Brown*
2 Green	8 Violet	14 Green*	20 Violet*
3 Blue	9 Turquoise	15 Blue*	21 Turquoise*
4 Yellow	10 Black	16 Yellow*	22 Natural*
5 White	11 Orange	17 White*	23 Orange*
6 Grey	12 Pink	18 Grey*	24 Pink*

* with black rings

Other fibre colour sequences available on request

Fibre Type

Single mode fiber 9/125
Multi mode fiber 50/125
Multi mode fiber 62,5/125

See the Fibre Specification sheet

Loose tube colour

SM 9/125	Yellow
MM 50/125	Green
MM 62,5/125	Blue

See the Fibre Specification sheet

Sheat Marking

Print colour	White
Print method	INK-Jet
Print legend	manufacturer's name, cable type job number, length marking @ 1 m intervals

Other print legends available on request

Order example

2100 m A/I-DQ(ZN)BH 24E9/125G.652D jacket colour NAT, specification Z101

Mechanical and Environmental properties

Max. tensile strength	*E1A	2000 N
Crush resistance	*E3	2000 N/10cm
Impact resistance	*E4	3 impacts (w/20N.m)
Min. bend radius	*E11A	10× cable diameter
	*E11B	15× cable diameter (load)
Moisture resistance	*F5	passed
Compound flow	*E14	30 cm / 24h / 70°C passed
Temperature range	*F1	
	installation	-5 °C to +50 °C
	operation	-20 °C to +70 °C
	storage	-30 °C to +70 °C
Cable informative nominal weight (calc.)		67 kg/km
Packaging		Plywood drum
Loose tube diameter		3,2 mm
Outer jacket thickness		1,5 ± 0,3 mm
Cable outer diameter		7,5 ± 0,5 mm
		(measured acc..to EN 60811-1-1)

* IEC 60794-1-2

Note: When installing or assembly under temperature bellow 5°C cable has to be stock in temp of 20°C at least 24h before installation.

Cable life time - minimum 30 years

Suitable for indoor use

Flammability	EN 50266-1, EN 50266-2-2
Acid gases	EN 50267-1, EN 50267-2-2, EN 50267-2-3
Smoke density	EN 61034-1, EN 61034-2

