


Type:	AERO-DR03 2F (PUR)	REV: 1.1
Issued:	18/04/2023	AM
Modified:	19/04/2023	AM
Project:	034-23	

FIBRAIN AERO-DR03 2F (PUR)



*Schematic drawing, not to scale

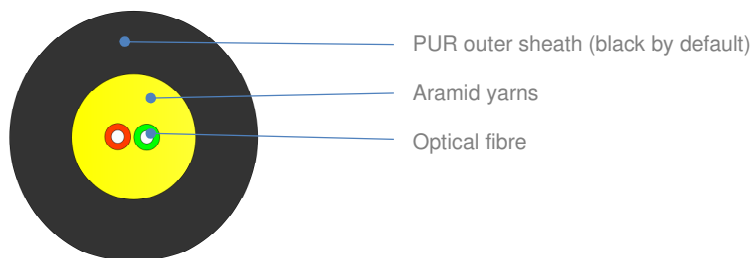

APPLICATION

Installation on poles
Fully dielectric
Aerial applications

DESIGN

Flame retardant, halogen free PUR outer jacket
UV resistant additive
Aramid yarns reinforcement
2 optical fibres guided directly into the cable

CABLE DESIGNS

Variant	Quantity [pcs]				Ø nominal (±5%) [mm]	Nominal weight (±10%) [kg/km]	Max allowed tension [N]
	Fibres	Active tubes or modules	Total elements	Active tubes or modules			
2F	2	0 (2x250µm)	0	0	3,0	8	300

MAIN MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Test	Test Standard	Specified Value	Requirement*
Max allowed tension	IEC 60794-1-21-E1	Load: as provided in table above	$\Delta\epsilon_r \leq 0,6\%$, $\Delta\alpha 0,1$ [dB/km]
Crush	IEC 60794-1-21-E3	2000 N / 100 mm, max. 15 min	$\Delta\alpha$ reversible, no significant damage
Impact	IEC 60794-1-21-E4	10 Nm, 3 impacts, R= 300 mm	$\Delta\alpha \leq 0,05$ dB after the test
Torsion	IEC 60794-1-21-E7	50N, $\pm 180^\circ$, 10 cycles	$\Delta\alpha \leq 0,05$ dB, no damage
Repeated Bending	IEC 60794-1-21-E6	R=12x D, 50N, 20 cycles	no damage
Temp. range	Installation	$\Delta\alpha \leq 0,1$ [dB/km]	-5... +55 [°C]
	Operation		-40... +70 [°C]
	Transport & Storage		-40... +70 [°C]
Water penetration	IEC 60794-1-22-F5	Sample=3m, water column=1m, 24h	no water leakage
CPR Class	EN 50575:2014+A1:2016		Eca

(*) values for single-mode fibres, all optical measurements performed at @1550nm

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and tubes identification information please see **DSH_Colors_CODE_XXXX** document.

FIBRES PARAMETERS

For selected post-production optical fibres parameters please see **DSH_OFP** document.

APPLICATION AND CABLE SPAN CHARACTERISTIC

Loading conditions	Span	Installed Sag (2%)	Tension	Total sag	Horizontal sag	Vertical sag
	[m]	[m]	[N]	[m]	[m]	[m]
Ice- 0 mm Wind- 94,4 km/h	55	1.1	300	2,1	1,8	1,0
Ice- 3,0 mm Wind- 62.8 km/h	40	0,8	300	1,6	1,34	0,87
Ice- 4,0 mm Wind- 70 km/h	30	0,6	300	1,23	1,09	0,57

Type:	AERO-DR03 2F (PUR)	REV: 1.1
Issued:	18/04/2023	AM
Modified:	19/04/2023	AM
Project:	034-23	

MARKING

The following print (inkjet) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN AERO-DR03 PUR 2F SM G657A1 "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is ±0,5%. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

STANDARD PACKING

Cables will be shipped on disposable plywood drums. Both ends of the cable will be capped and at least one accessible for testing. Identification information will be placed on a drum.

DELIVERY LENGTH

2000 – 8000 meters ± 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.