

LightScope ZWP® Single Jacket/Single Armor, Gel-Free, Outdoor Stranded Loose Tube Cable

- Corrugated steel tape armor is strong yet flexible, providing additional crush and rodent protection


Product Classification

Portfolio	CommScope®
Product Type	Fiber OSP cable
Regional Availability	Asia Australia/New Zealand EMEA Latin America North America

Standards And Qualifications

Cable Qualification Standards	ANSI/ICEA S-87-640 EN 187105 Telcordia GR-20
-------------------------------	--

Representative Image

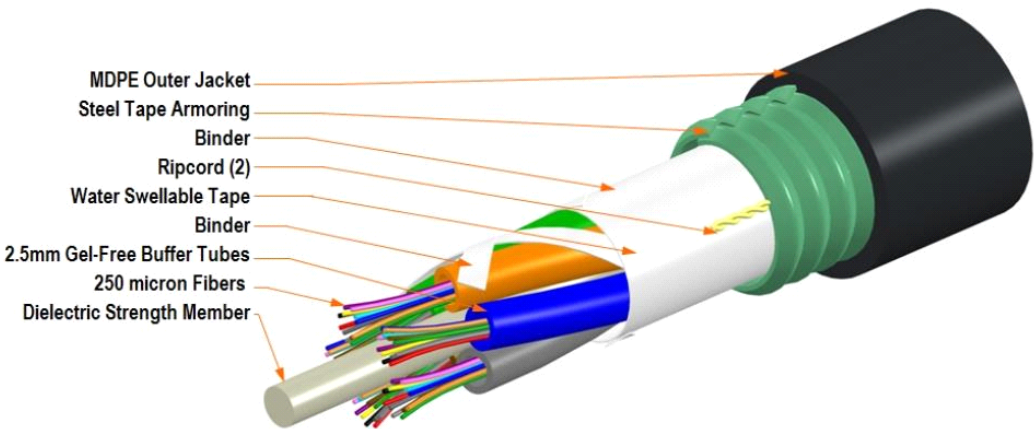

General Specifications

Cable Type	Stranded loose tube
Construction Type	Armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	G.652.D and G.657.A1
Jacket Material	PE
Total Fiber Count	48

Armor Type	Corrugated steel
Fiber Type	G.652.D and G.657.A1
Fiber Type, quantity	48
Fibers per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	2.50 mm 0.10 in
Cable Weight	110.0 kg/km 74.0 lb/kft
Diameter Over Jacket	11.50 mm 0.45 in
Filler, quantity	1
Subunit, quantity	4

Physical Specifications

Minimum Bend Radius, loaded	17.3 cm 6.8 in
Minimum Bend Radius, unloaded	11.5 cm 4.5 in
Tensile Load, long term, maximum	800 N 180 lbf
Tensile Load, short term, maximum	2700 N 607 lbf
Vertical Rise, maximum	740.0 m 2429.0 ft

Environmental Specifications

Environmental Space	Aerial, lashed Buried
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	44 N•m 250 lb/in
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	35 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	4.41 N-m 3.25 ft lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7

Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C 28 °F
Cable Freeze Test Method	FOTP-98 IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

Included Products

DB-8W-LT (Product Component—not orderable) — LightScope ZWP® Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable