

Patch panel HD 3U, without grounding, empty



DESCRIPTION:

- Modular configuration system:
 - Possibility for FO/Cu assembling,
 - Suitable for SPL cassettes, MPO cassettes, BOT cassettes
- Capacity: 20 slots for FO/Cu insertion
- Max port density:
 - 240 ports for SC SX FO
 - 480 ports for LCdx FO
 - 120ports/3U for copper
- Full range of connectors:
 - RJ45/u (unshielded) – kat.5, kat.6. kat.6A
 - LCdx, SC – MM/SM

TECHNICAL SPECIFICATION

Material:

Frame – powder paint coated steel
Guidance – Plastic

Color:

Black RAL 9005

Temperature range

-40°C do +70°C

Ingress protection:

IP 20 according to PN-EN 60529.

Weight:

2.65 kg


Scope of supply:

Frame, empty

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary.

| | | |
|-------|-------------------|------------|
| Type: | Patch panel HD 3U | 22.01.2020 |
| | | REV: 1.0 |
| PN | XFU00 | AL |

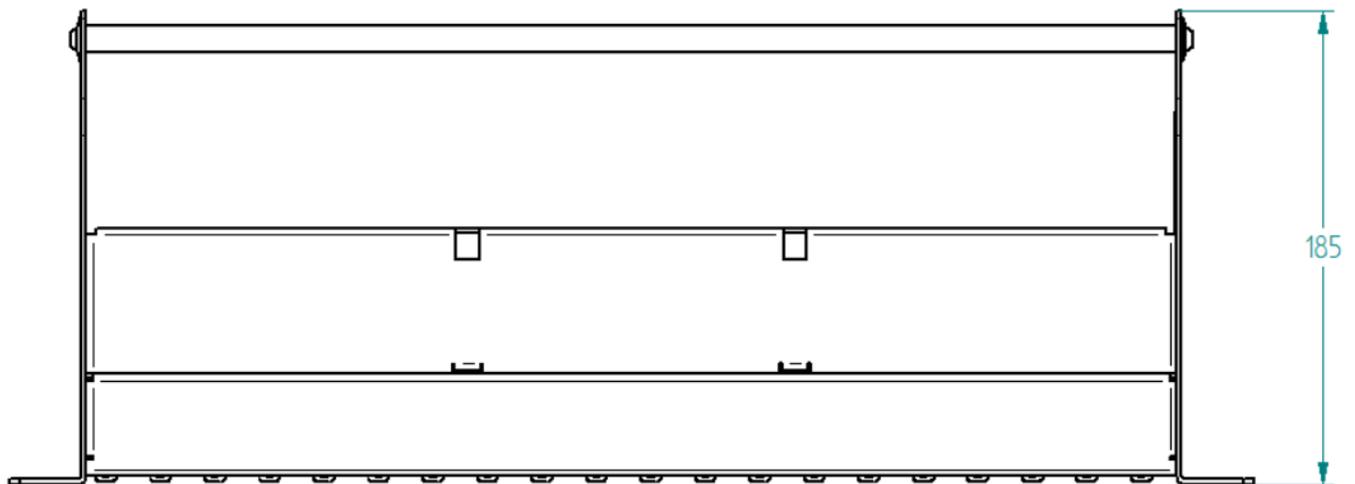

| Height [U = 44,45mm] | Dimensions | | Reference number |
|-------------------------|--------------|------------|------------------|
| | Width [inch] | Depth [mm] | |
| 3U | 19 | 185 | XFU00 |

Important notice

Buyer and/or user of this product has to make sure before using this product that it is suitable for the intended use. All questions of liability relating to this product are subject – in accordance with the prevailing – to the Term of Sale of the selling Fibrain subsidiary. 2