


Type:	AERO-DR035	REV: 0
Issued:	15/10/2021	KP
Project:	079-21	
Status:	DRAFT- all values are subjected to change	

FIBRAIN AERO-DR035

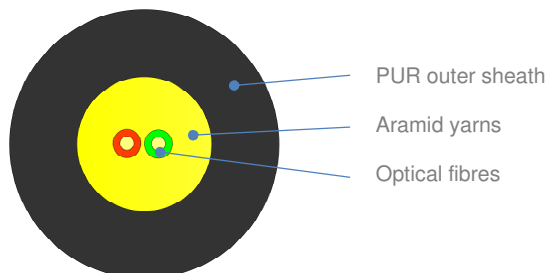

*Schematic drawing, not to scale

APPLICATION:

For installation on poles
 Fully dielectric
 Aerial cable with aramid reinforcement

DESIGN:

Black PUR outer sheath (flame retardant, halogen free)
 Aramid yarns as a strain relief and water absorbent
 2 optical fibres
 UV resistant additive

CABLE DESIGNS:

Variant	Fibres	Ø nominal (±5%)	Nominal weight (±10%)	Max allowed tension
	[pcs]	[mm]	[kg/km]	[N]
2F	2	3,5	11	840

MAIN MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Test	Test Standard	Specified Value	Requirement*
Max allowed tension (short term)	IEC 60794-1-21-E1	840N, 10 min	$\Delta\alpha$ reversible
Max operational tension	IEC 60794-1-21-E1	500 N	$\Delta\alpha \leq 0.1$ dB/km
Crush	IEC 60794-1-21-E3	1000 N / 100 mm, 10 min	$\Delta\alpha \leq 0.1$ dB, after test
Repeated Bending	IEC 60794-1-21-E6	R=12x D, 50N, 20 cycles	no damage
Temp. range	Installation	$\Delta\alpha \leq 0.1$ [dB/km]	-5... +55 [°C]
	Operation		-30... +60 [°C]
	Transport & Storage		-30... +70 [°C]
Water penetration	IEC 60794-1-22-F5B	Sample=3m, water column=1m, 24h	no water leakage

(*) values for single-mode fibres, all optical measurements performed at @1550nm

SPAN CHARACTERISTIC

Loading conditions	Max SPAN	Installed SAG (1%)
	[m]	[m]
Wind: 22 [m/s] According to PN-EN 1991-1-4:2005 Ice: 4,1 + 0,41d [N/m] According to EN 50341-3-22-2001	50	0.6

OPTICAL FIBRES AND LOOSE TUBES COLOUR IDENTIFICATION

For optical fibres and tubes identification information please see **DSH_Colors_CODE_XXXX** document.

FIBRES PARAMETERS

For selected post-production optical fibres parameters please see **DSH_OFP** document.

MARKING

The following print (inkjet) is applied at 1-meter intervals:

- Supplier: FIBRAIN
- Standard code (Product type, fibre type, fibre count)
- Year of manufacture: xxxx
- Length marking in meters
- Cable ID / Drum No

Example: FIBRAIN AERO-DR035 NXR 2F SM G657A2 "YEAR OF MANUFACTURE" "LASER SYMBOL" "LENGTH MARKING" "BATCH NUMBER"

The accuracy of marking is $\pm 0.5\%$. Remarking is in accordance with Bellcore GR 20 and supersedes earlier markings. Occasional loss of marking is possible. Cables can be supplied with a range of single mode or multimode fibres and customized print.

Type:	AERO-DR035	REV: 0
Issued:	15/10/2021	KP
Project:	079-21	
Status:	DRAFT- all values are subjected to change	

STANDARD PACKING

Cables will be shipped on disposable plywood drums. Both ends of the cable will be capped and at least one accessible for testing. Identification information will be placed on a drum.

DELIVERY LENGTH

2000 – 8000 meters \pm 5%, with possibility of supplying up to 5% of total contract quantity as short length cables which should be above 1000 meters long. Tolerance of 5 % of order quantity shall be allowed.

This document and the statements contained in it are not intended for customers within the meaning of the Civil Code. The information submitted in this document is to our knowledge and belief true at the time of issue, however, we do not assume any liability whatsoever for its accuracy, and completeness. This document is for informational purposes on an "as is" basis only and Fibrain reserves the right to change its contents at any time without prior notice. The specification cannot, in any case, be considered an offer within the meaning of the Civil Code and is not contractually valid unless specifically authorized by Fibrain. Before using this product, its buyer and/or user has to make sure that it is suitable for the intended use. All liability issues related to this product are subjected to the seller's separate Terms of Sale or the terms and conditions agreed with the Fibrain representative or distributor.

Type:	AERO-DR035	REV: 0
Issued:	15/10/2021	KP
Project:	079-21	
Status:	DRAFT- all values are subjected to change	

Data	Zmiany	Rewizja	Autor
11/09/2020	Założenie karty na podstawie 039-19 NXR, usunięcie tabeli ze SPANami	1.0	KP
15/10/2021	Założenie karty na potrzeby wyprzedaży zalegających odcinków; Nadruk NXR; Kabel w powłoce PUR; Zaniżyłem SPAN z 60 na 50m ze względu na średnie wyniki	0	KP